

4

3

2

1

D

D

C



C

B

B

A

A

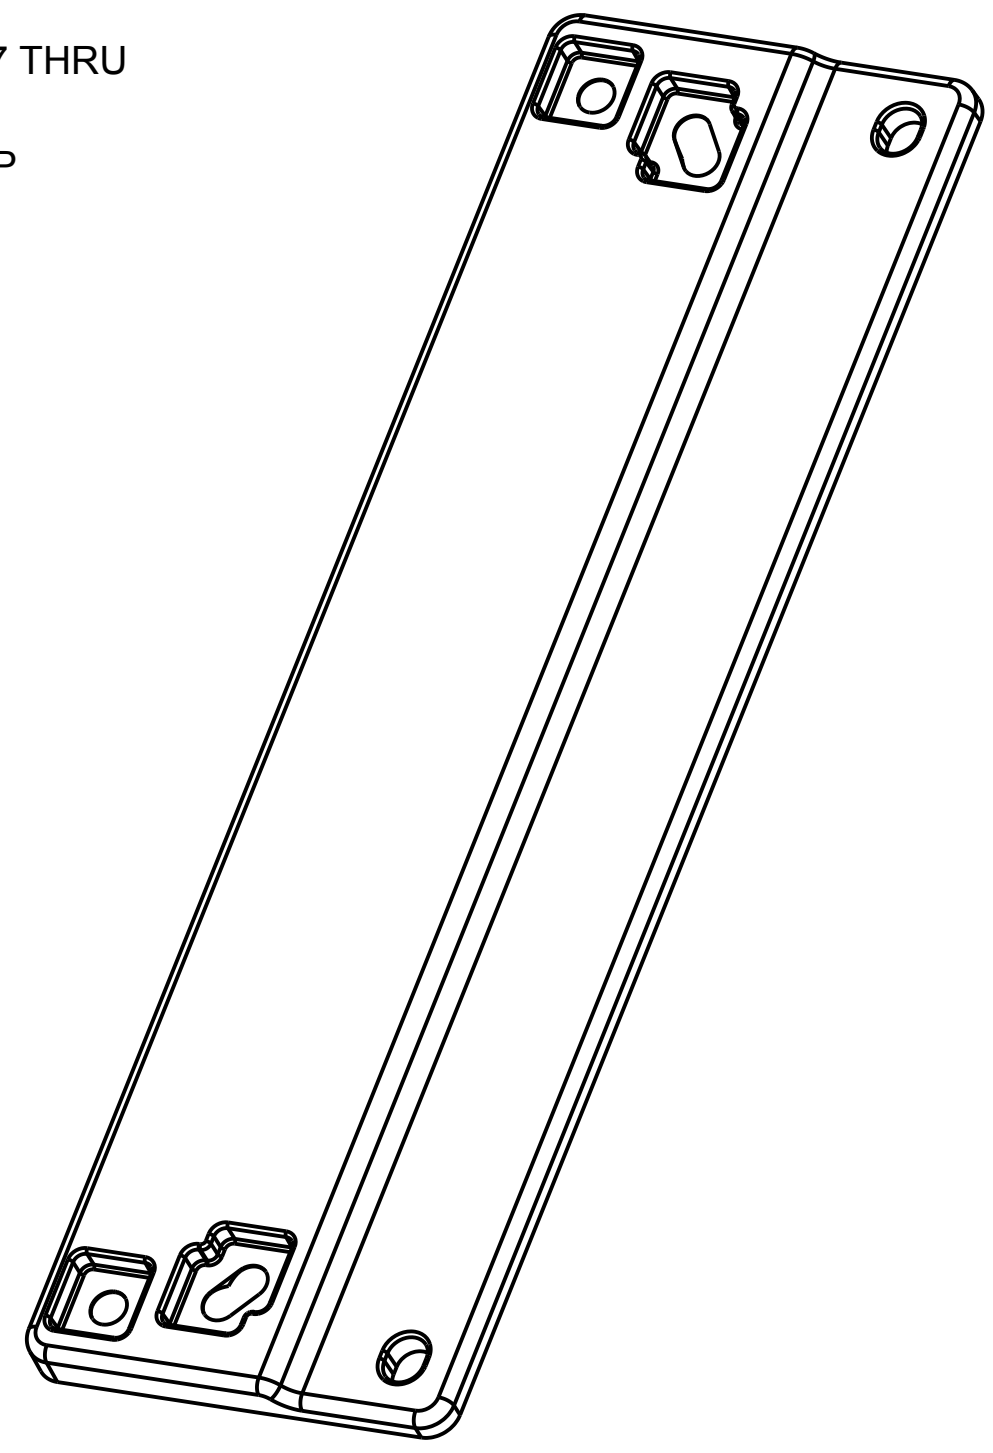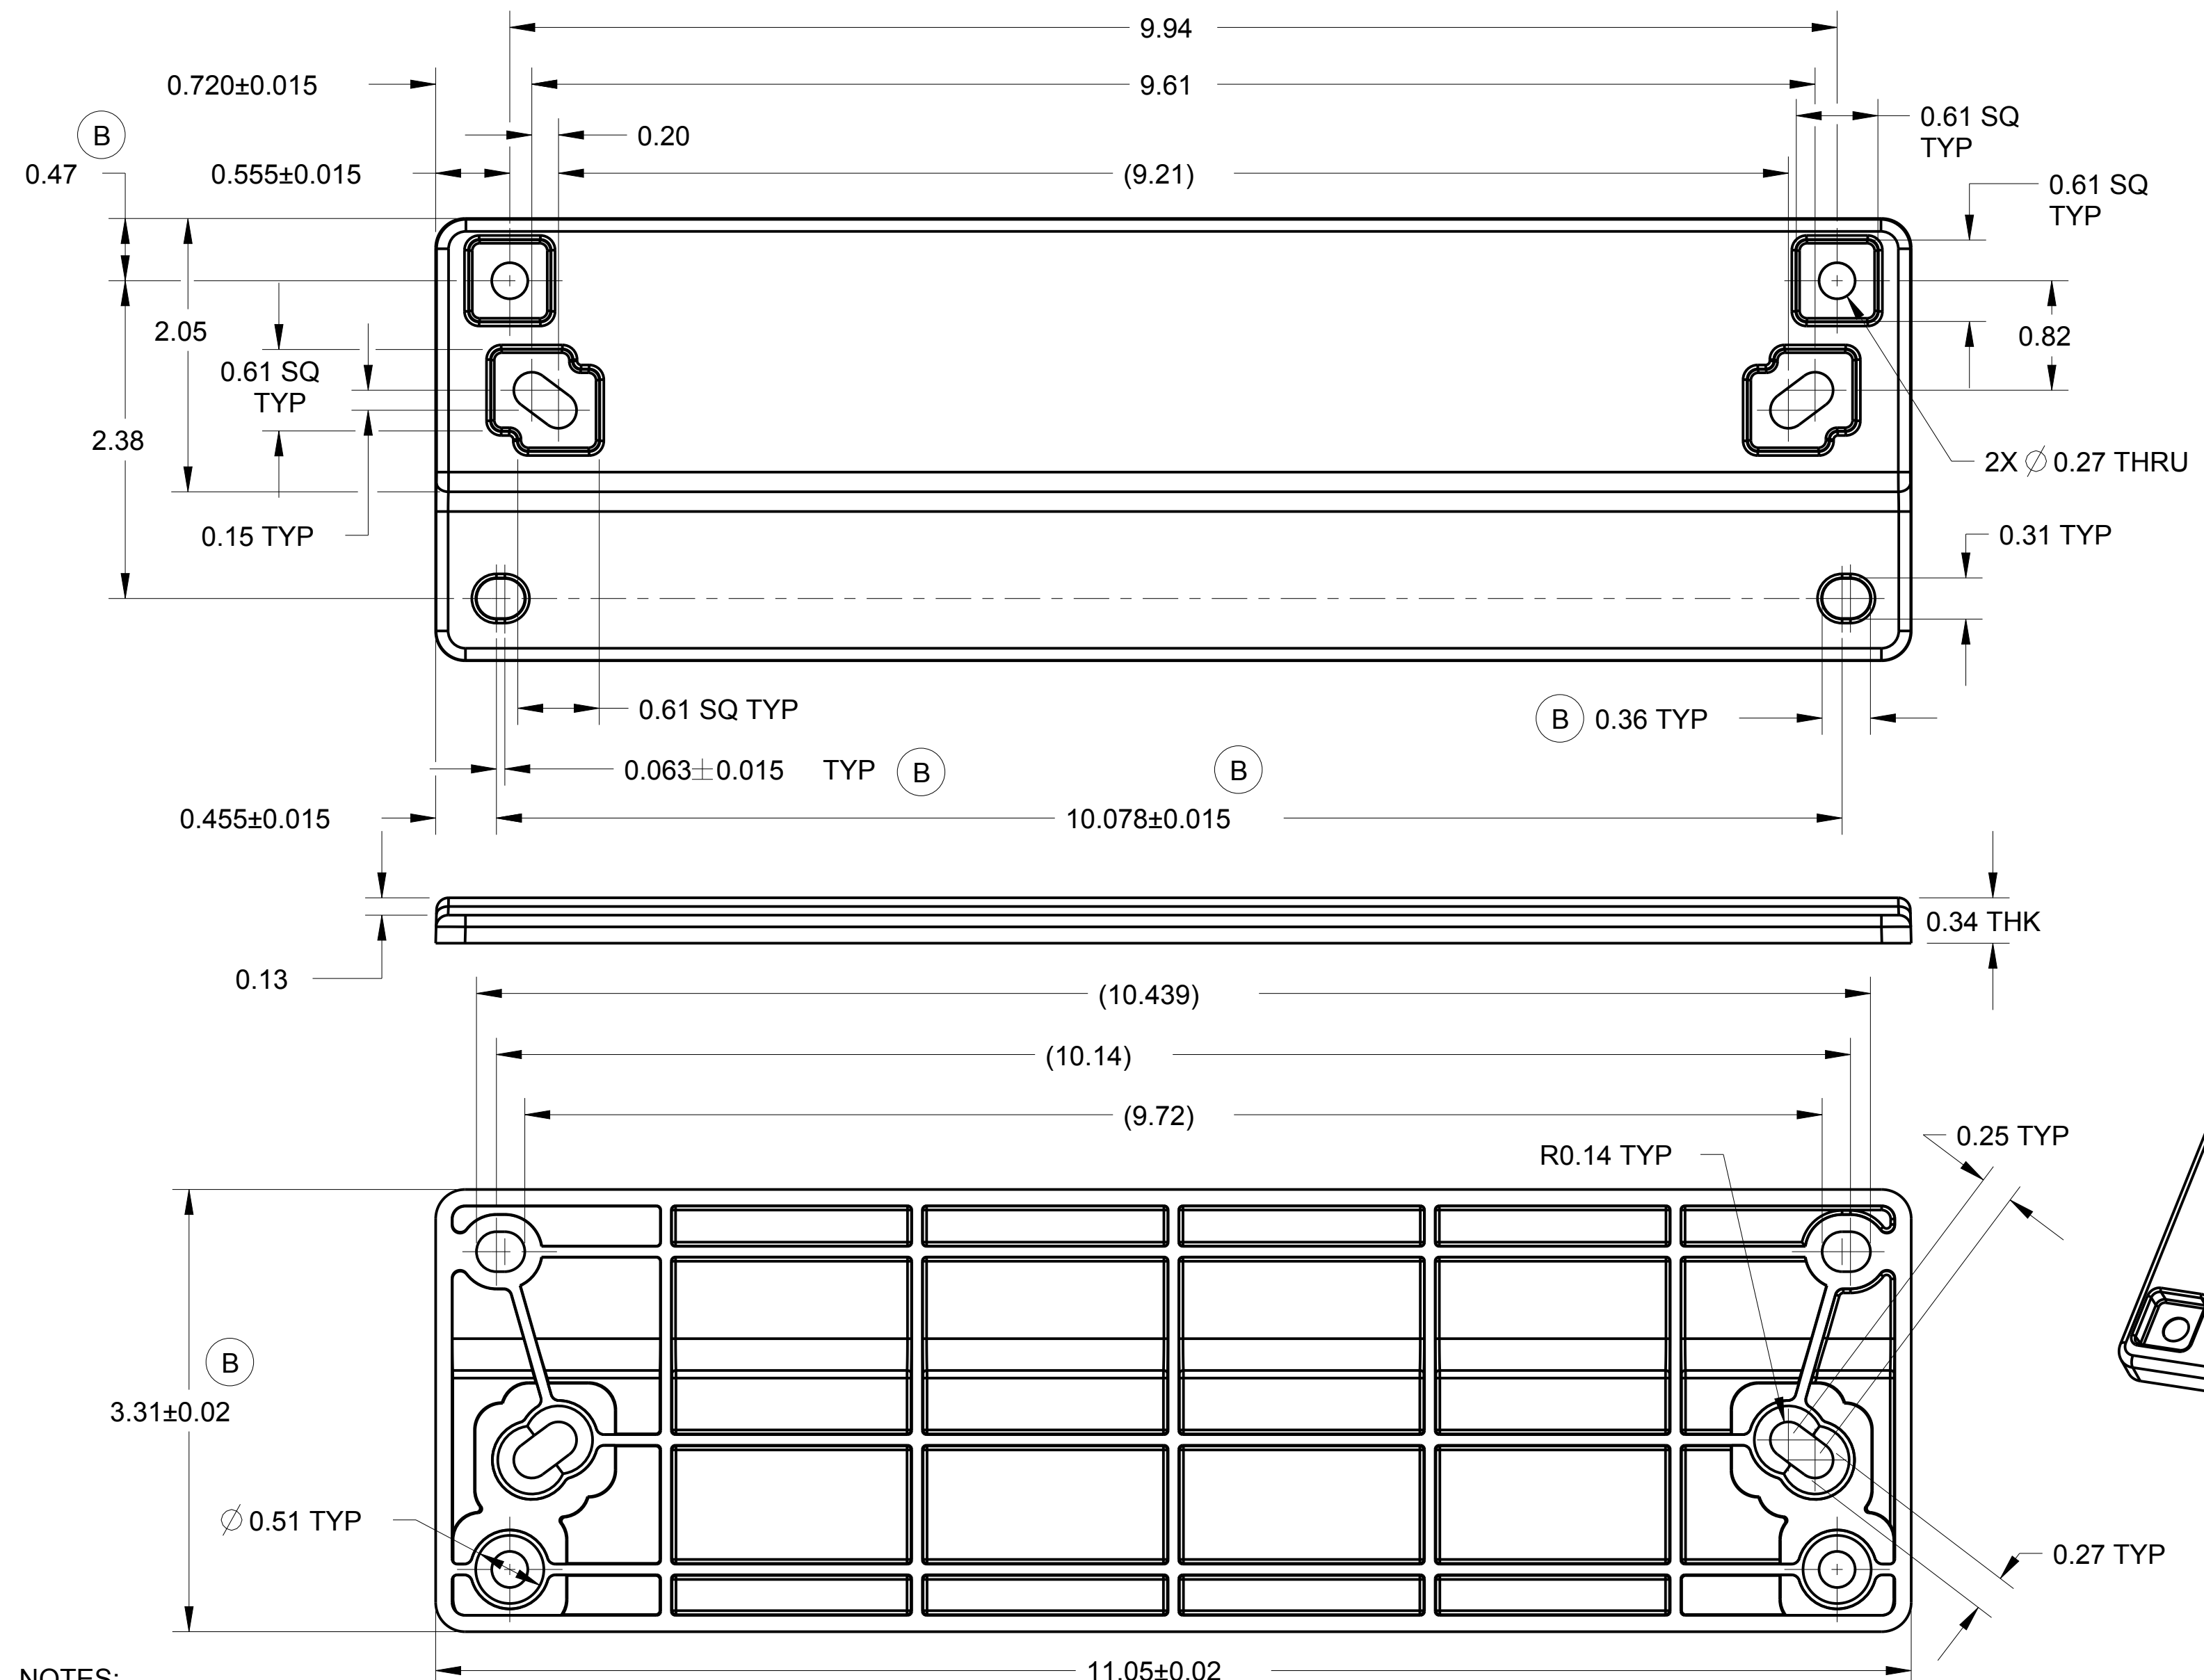

- NOTES:
1. MATERIAL: POLYCARBONATE, PC-FRO
UL RECOGNIZED 94V-0, 94 5VA.
 2. COLOR: INTEGRA GREY, PANTONE 422C
 3. ALL FILLETS AND CORNER RADII TO BE .01 INCH UNLESS OTHERWISE SPECIFIED.
 4. GATE SHALL BE FLUSH TO .02 INCH RECESSED.
 5. MOLD FLASH NOT TO EXCEED .01 INCH.
 6. CONTAMINATION, BURNING AND DISCOLOR ARE NOT PERMITTED.
 7. PARTS MUST BE COMPLETELY FILLED. NO SHORTS.
 8. DRAG MARKS, PIN MARKS, SPLAY MARKS, FLOW LINES, PULLING VOIDS, CRACKS AND WARPING ARE NOT PERMITTED.

REV	DESCRIPTION	BY	DATE	ECN NO.	APPROVED BY
B	REVISED SLOT FROM 0.31 X 0.56 TO 0.31 X 0.36. REV DIM FROM 9.88 TO 10.078, REV FROM 0.25 TO 0.063, REV FROM 2.27 TO 2.31, REV FROM 0.45 TO 0.47. ADDED NOTES.		1-6-14	2014-102	
A	RELEASED TO PRODUCTION AT REV A		9-4-12		

DEFAULT TOLERANCES		INTEGRA ENCLOSURES		MUM INDUSTRIES 7750 TYLER BLVD MENTOR, OHIO (440) 289-8155 FAX (440) 289-8188	
DECIMAL .XX ±0.01 .XXX ±0.005	SCALE 1.000	SHEET 1 of 1	DRAWN BY W.TIDWELL		
FRACTIONAL ± 1/64	TITLE 12 INCH MOUNTING FLANGE				
ANGULAR ±1°	DATE 09.04.12	DRAWING NUMBER MFLK12	REV B		

4

3

2

1