



## Features & Benefits

- **Quality material** – 304 stainless steel with NEMA 4X corrosion protection and #4 brush finish
- **Water-tight seal** – flange collar provides drainage channel around all sides of enclosure and a wide sealing face for water-resistant FIP gasket
- **Panel standoffs** – installed for easy mounting of subpanels (panels sold separately)
- **Available for QuickShip** – standard enclosures are in stock and ready to ship!
- **Wall Mountable** - includes bolt-on tabs and riv-nuts
- **Quarter-Turn Latch** and Removable Pin Hinge (Pinge™) come on all standard enclosures
- **Wide range of sizes** for every application
- **UL508A listed and NEMA 4X rated**


Mechanical & Thermal	Unit	Rating
Temperature Range	Deg. F	-40 to 140
Industry Standards		
UL/C-UL		508A
NEMA Rating		1, 2, 3, 3R, 4, 4X



Part Number	Height	Width	Depth	Material Thickness Cover / Base	Weight (lbs.)	4X IP66	Subpanel Part # (optional)	Subpanel Dimensions
W100804-4PQ-BT	10"	8"	4"	16 GAUGE / 16 GAUGE	6.0	✓	PNLB1008GVN	8 X 6
W100806-4PQ-BT	10"	8"	6"	16 GAUGE / 16 GAUGE	7.2	✓	PNLB1008GVN	8 X 6
W121004-4PQ-BT	12"	10"	4"	16 GAUGE / 16 GAUGE	8.1	✓	PNLB1210GVN	10 X 8
W121006-4PQ-BT	12"	10"	6"	16 GAUGE / 16 GAUGE	9.6	✓	PNLB1210GVN	10 X 8
W141206-4PQ-BT	14"	12"	6"	16 GAUGE / 16 GAUGE	12.3	✓	PNLB1412GVN	12 X 10
W201608-4PQ-BT	20"	16"	8"	16 GAUGE / 16 GAUGE	22.6	✓	PNLB2016GVN	18 X 14
W202008-4PQ-BT	20"	20"	8"	14 GAUGE / 16 GAUGE	26.6	✓	PNLB2020GVN	18 X 18
W202010-4PQ-BT	20"	20"	10"	14 GAUGE / 16 GAUGE	36.8	✓	PNLB2020GVN	18 X 18
W242008-4PQ-BT	24"	20"	8"	14 GAUGE / 16 GAUGE	30.7	✓	PNLB2420GVN	22 X 18
W242010-4PQ-BT	24"	20"	10"	14 GAUGE / 16 GAUGE	42.2	✓	PNLB2420GVN	22 X 18
W242408-4PQ-BT	24"	24"	8"	14 GAUGE / 16 GAUGE	35.3	✓	PNLB2424GVN	22 X 22
W242410-4PQ-BT	24"	24"	10"	14 GAUGE / 16 GAUGE	48.4	✓	PNLB2424GVN	22 X 22
W302410-4PQ-BT	30"	24"	10"	14 GAUGE / 14 GAUGE	57.6	✓	PNLB3024GVN	28 X 22
W302412-4PQ-BT	30"	24"	12"	14 GAUGE / 14 GAUGE	62.3	✓	PNLB3024GVN	28 X 22
W363012-4PQ-BT	36"	30"	12"	14 GAUGE / 14 GAUGE	84.9	✓	PNLB3630GVN	34 X 28



# STRONGBOX STANDARD

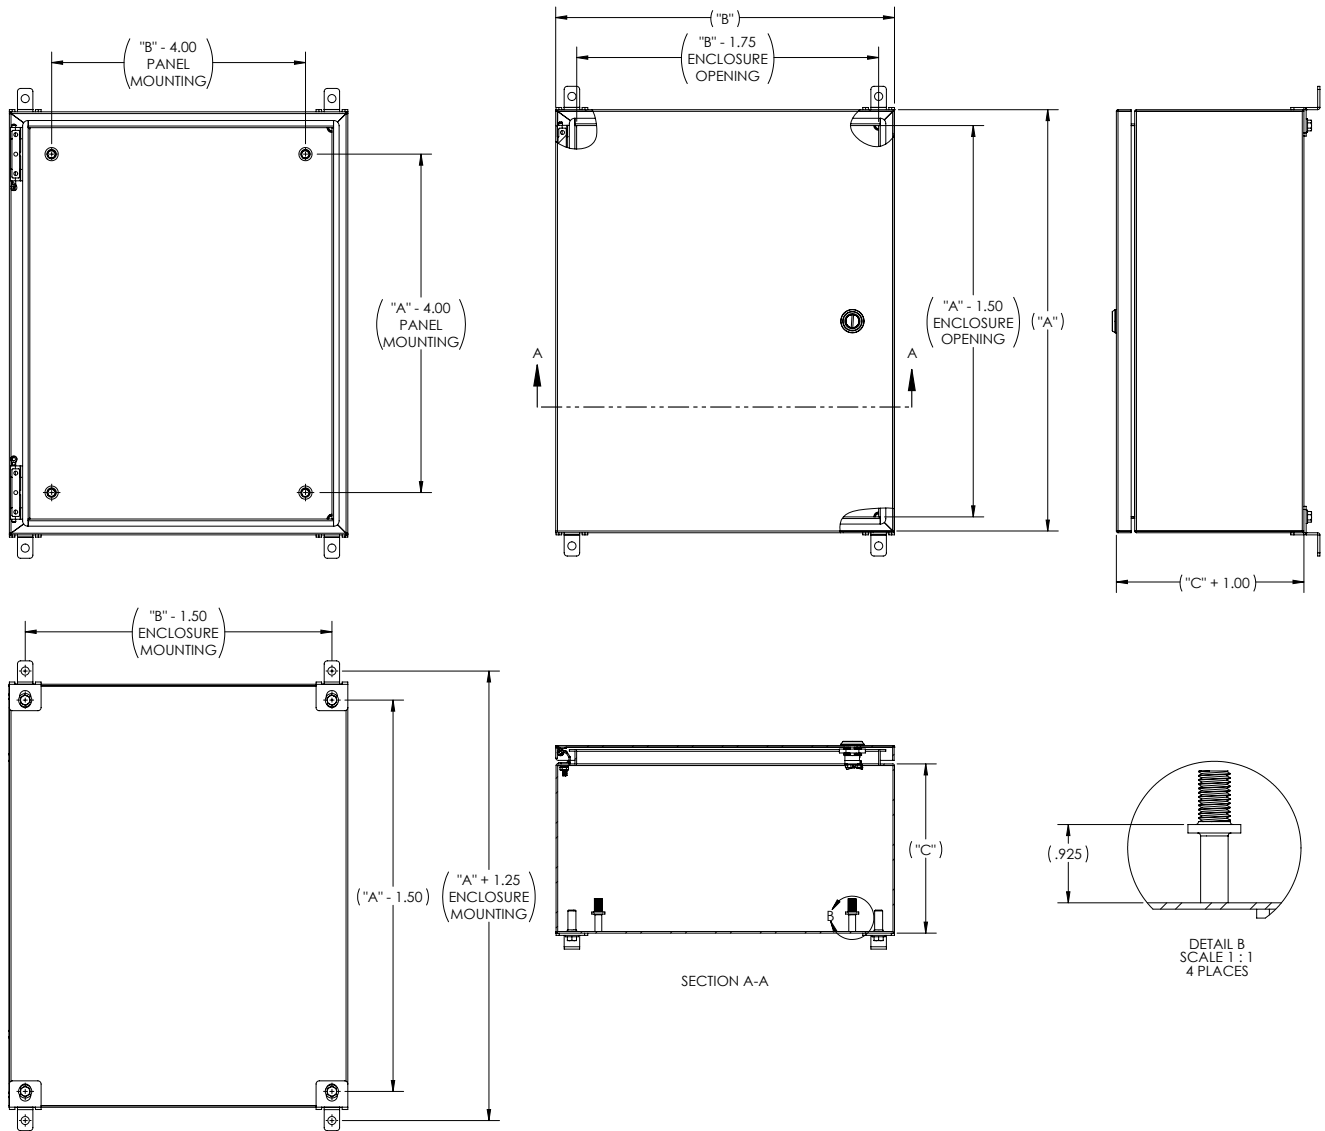

## TORQUE SPECIFICATIONS:

**Bolt On Tabs** - 1/4"-20 x 0.5" hex bolt (torque limit = 25 in lbs)

**Panels** - 1/4"-20 x 0.5" collar stud (torque limit = 25 in lbs)

[Bracketed dimensions in mm]

Register online to download detailed drawing files at [www.integraenclosures.com](http://www.integraenclosures.com)

## Accessories for Strongbox Standard (For complete accessories, see page 92)



### Steel Back Panels

Galvanized Steel Back Panels. See chart on page 67 for part numbers.



### Bolt-On Tabs

**NEMA-MTKIT** - Two stainless steel mounting tabs with screws.




### Literature Tray

**9220236-LT** - Large Integra Literature Tray  
**9920237-LT** - Small Integra Literature Tray



### Quarter-Turn Latch Assembly

**QTL-SLOT-177**  
**QTL-SLOT-256**



### Legs/ Floor Stands

Multiple sizes available. Contact factory for details.



### Cord Grips

IP68/NEMA 4X/6P rated. See page 78 for more details and part numbers