STRONGBOX WALL MOUNT

Features & Benefits

- **Built to spec** – 100% custom enclosures built to order. Work with our engineering dept. to get exactly what you need
- **Precise machining** – laser cut holes for connectors and accessories or window kits for easy viewing.
- **Wide range of sizes**, configurations and accessories provides capabilities for every application.
- **Powder coating available**. Choose from range of RAL color codes.
- **UL508A listed** and **NEMA 4X & 3SX rated**

Mechanical & Thermal	Unit	Rating
Temperature Range	Deg. F	-40 to 140
Industry Standards		
UL/C-UL		508A
NEMA Rating		1 ,2, 3, 3R, 4, 4X

WAYS TO CUSTOMIZE

Start with Quality Materials
We can build with 304 or 316 Stainless Steel or Marine Grade Aluminum.

Choose your Dimensions
We can accommodate various HxWxD requests up to 90 inches tall with the capabilities of multiple doors up to 5. Submit design requirements to engineering. These configurations may not provide a UL rating and are subject to engineering approval.

Latch Options
Quarter-Turn Latch
Integra Locking Latch
3-Point Latch (Required for NEMA 3SX Rating)

Mounting Options
Rivet Nuts or Through Holes
Welded or Bolt-on Tabs
Welded or Bolt-on Flange
Multiple Sizes of Legs (Floor Stands)

Hinge Options
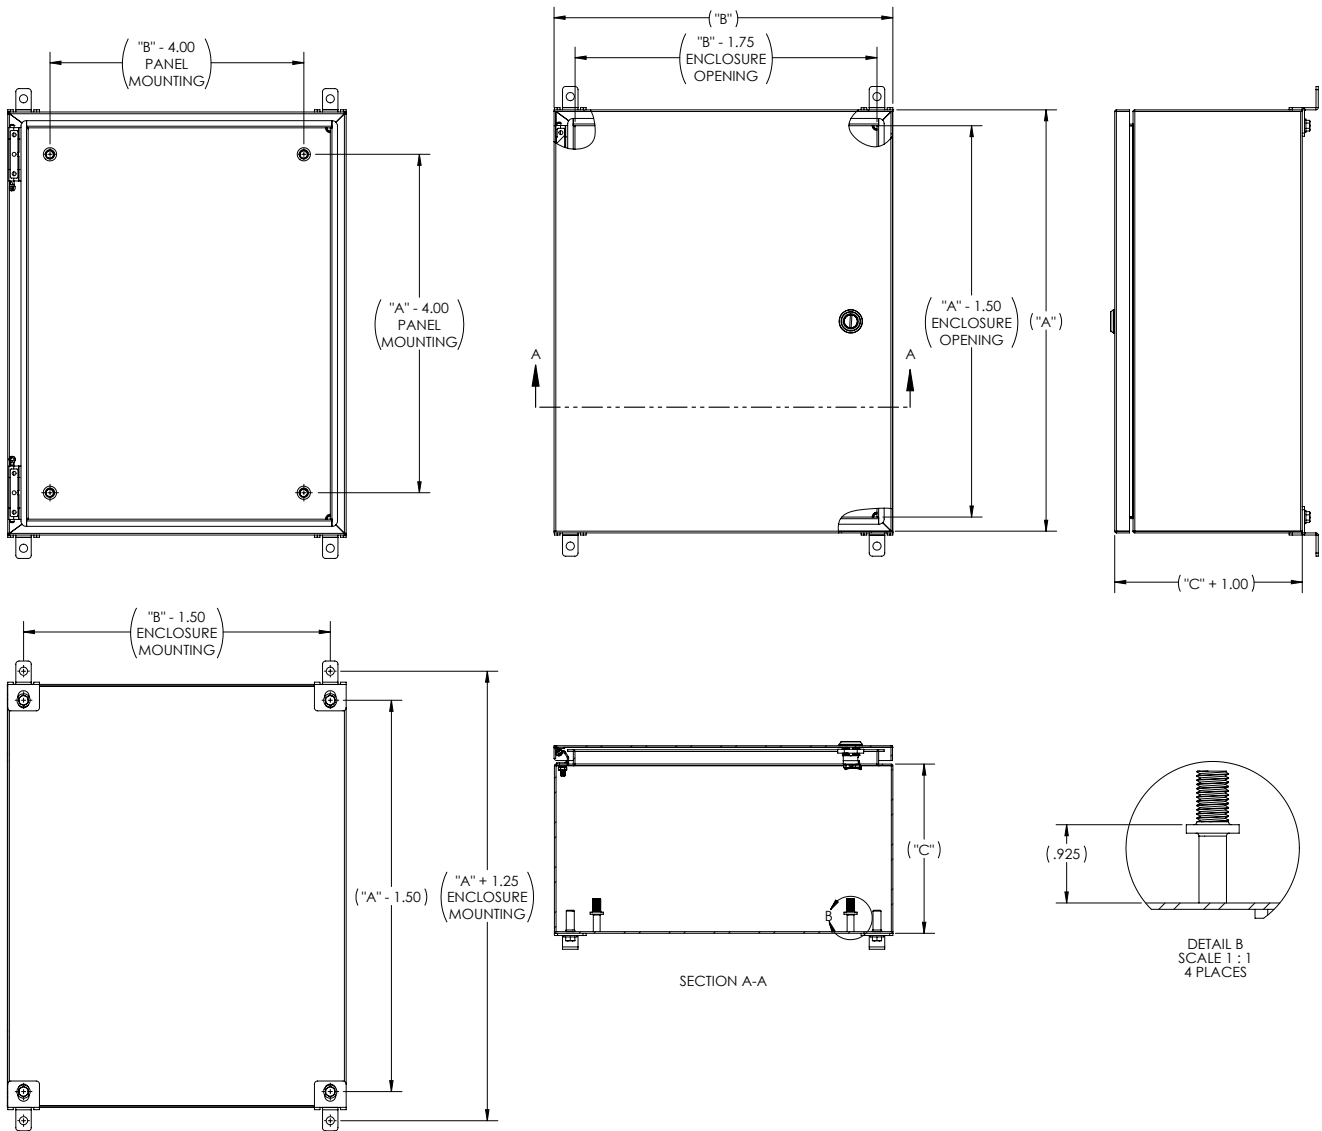Removable 316 Stainless Steel Hinge (Pinge™)
Continuous (Piano) Hinge
Lift-Off Hinge

Gaskets
Polyurethane Foam-In-Place Gasket
Pressure Sensitive Peel & Stick

Custom Laser Cut Machining
Precision laser cut machining for cable glands, window kits and more. Send a detailed drawing to customerservice@integraenclosures.com for a quote.

Custom Printing and Engraving
Full-color silk screening and precise engraving are available. Add your company logo or important safety information to enclosure for a great looking finished product.

Multiple accessories are available for all models, including custom back panels, swing panels, drip shields and literature trays. Back panels and swing panels can be modified to include custom hole patterns to fit your application.

*2 Door variant with removable center channel & expanded envelope also available.

"B" - 4.00
PANEL
MOUNTING

"A" - 4.00
PANEL
MOUNTING

("B")

"B" - 1.75
ENCLOSURE
OPENING

"A" - 1.50
ENCLOSURE
OPENING

("A")

A

A

("C" + 1.00)

"B" - 1.50
ENCLOSURE
MOUNTING

("A" - 1.50)

"A" + 1.25
ENCLOSURE
MOUNTING

("C")

SECTION A-A

(.925)

DETAIL B
SCALE 1 : 1
4 PLACES

Submit drawings to customerservice@integraenclosures.com for approval and quote.
*Unless otherwise specified, our standard gauge size for enclosures 20"x20" and smaller are 16 gauge.
For enclosures 20"x20" and larger, our standard is 14 gauge.

Accessories for Strongbox Custom (For complete accessories, see page 92)

Back Panels
Aluminum, Stainless Steel
and Galvannealed Steel
back panels can be modified
with holes

Gland Plates
UL NEMA 4X rated gland
plates for cable entry.
Contact factory for details

Literature Tray
9220236-LT - Large Integra
Literature Tray
9920237-LT - Small Integra
Literature Tray

Windows
Flush-mount and exterior-
mount window options
available. Contact factory
for details.

PEMs
Threaded and non-threaded
PEMs can be installed or
shipped separately.

Cord Grips
IP68/NEMA 4X/6P rated
See page 78 for more details
and part numbers.